

# ROSCAMAT® USA

**PNEUMATIC**



[eurolinkinc.com](http://eurolinkinc.com)

YOUR COMPANY  
LOGO & CONTACT  
**HERE**

SALES SUPPORT & SERVICE  
(740) 392-0330

**Reach**


→ **88"**

↑ **44"**

**Capacity**

US: **#0 - 7/8"**

METRIC: **M1.6 - M27**

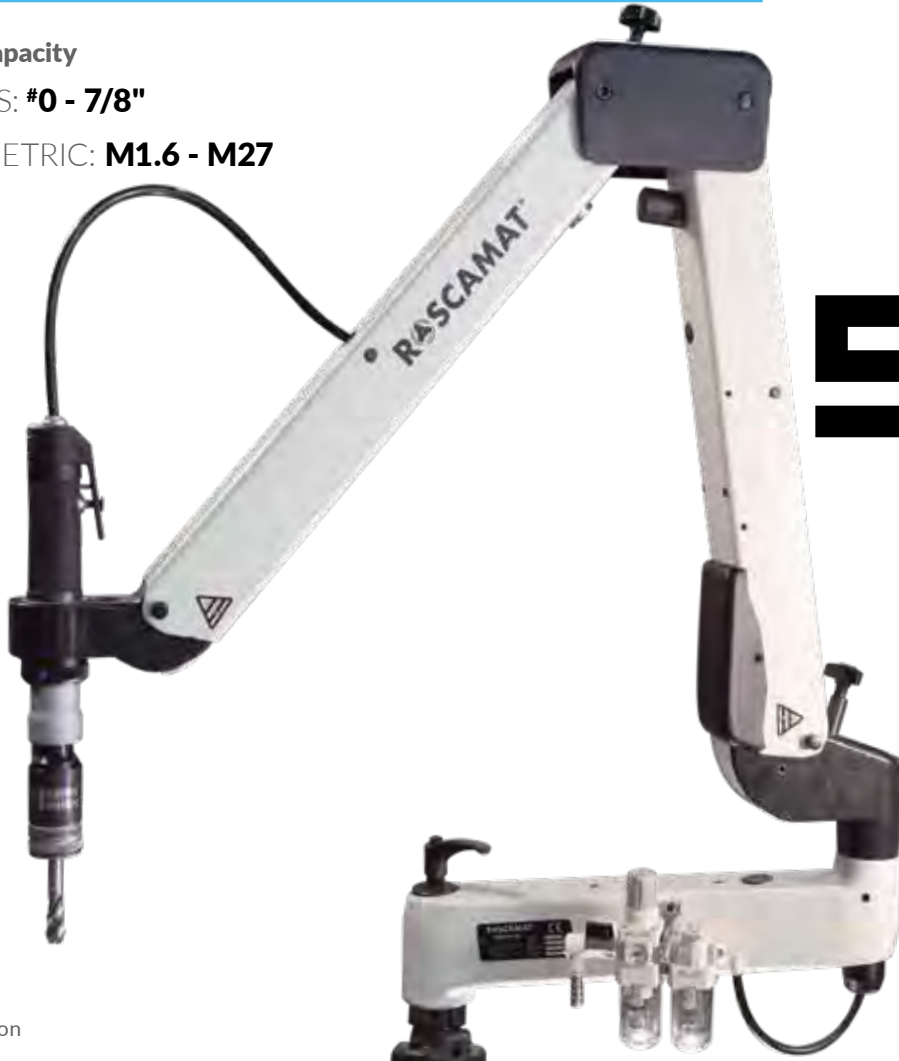

# ROSCAMAT® 500

**Features**

- Maximum Reach

**Options**

- Tap at Any Angle
- Automatic Lubrication

Series 500 Any Angle

EDP	Description	Orientation	Auto Tool Lubrication	Speed RPM
R59100F	Series 500 Vertical	Vertical		90-2100
R59300F	Series 500 Vertical with Lubrication	Vertical	●	90-2100
R59200F	Series 500 RHM Any Angle Manual	Any Angle		90-2100
R59400F	Series 500 RHM-E Any Angle Manual with Lubrication	Any Angle	●	90-2100
R59500F	Series 500 RHC Any Angle Constant	Any Angle		90-2100
R59600F	Series 500 RHC-E Any Angle Constant with Lubrication	Any Angle	●	90-2100

**Interchangeable Speed Modules\***

EDP	Description	Capacity		Adapter Size	Max Torque (ft-lb <sub>r</sub> )
		Inch	Metric		
R40510F	90RPM Module	5/16" - 7/8"	M8 - M22	#2	66
R40520F	170RPM Module	5/16" - 5/8"	M8 - M22	#2	58
R40530F	300RPM Module	#0 - 9/16"	M1.6 - M14	#1	32
R40540F	550RPM Module	#0 - 1/2"	M1.6 - M12	#1	18
R40550F	750RPM Module	#0 - 3/8"	M1.6 - M10	#1	13
R40560F	1050RPM Module	#0 - 5/16"	M1.6 - M18	#1	9
R40570F	2100RPM Module	Drill up to 5/16" ø		B16	4



\*Module required for tapping. Arm & module sold separately.

[WWW.ROSCAMATUSA.COM](http://WWW.ROSCAMATUSA.COM)